


开窗机链 Window Opener Chain


开窗机链是安装在链式开窗机内，用来推拉窗户，一般选用不锈钢制造，也可以根据客户要求用碳钢表面镀镍、镀锌、镀铬和达克罗防腐处理。

Window opener chain is installed in the chain type window opening machine, used for pushing and pulling the windows. Usually it is made of stainless steel material, or can be made based on the customer's requirements, which adopting the material of carbon steel by using the surface corrosion prevention way of zinc plating, nickel plating, chrome plating and dacromet.

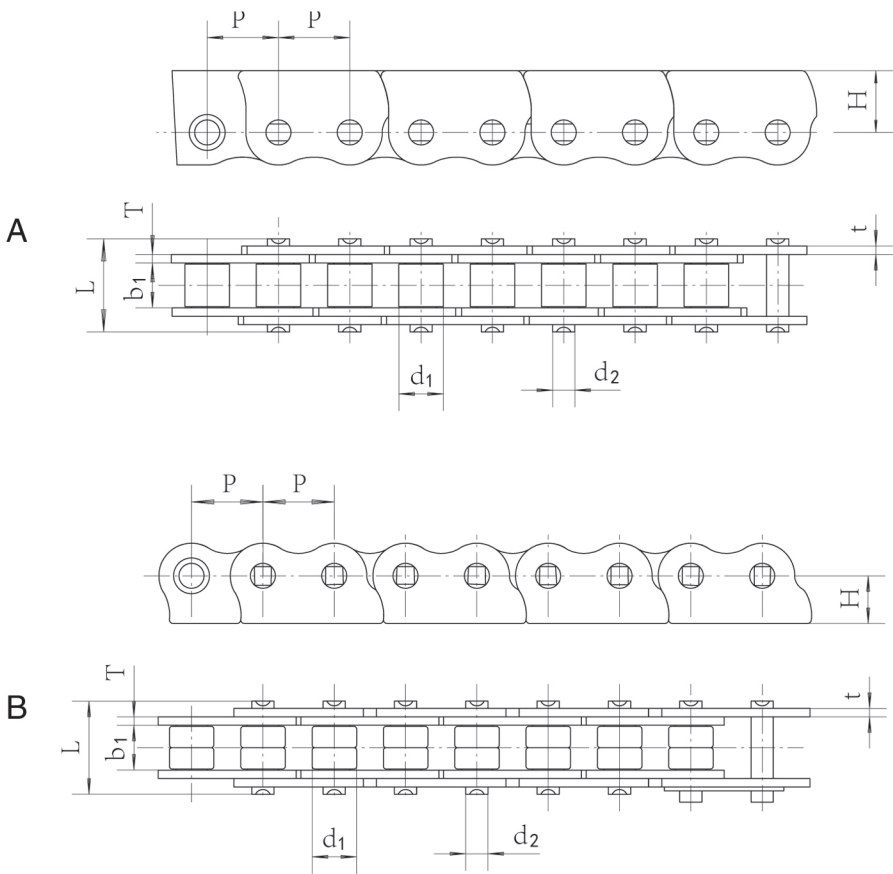


ANSI 链号 Chain No.	节距 Pitch	滚子 直径 Roller diameter	内节内宽 Width between inner plates	销轴 Pin		链板 Plate		图示 Type	最小抗拉 强度 Minimum tensile strength
	p mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	L mm	H mm	t/T mm		Fu(min) kN
C08BSS-N15	12.7	8.51	7.75	4.45	16.5	11	1.52	A	10
C08BSS-TK1-2G	12.7	8.51	7.75	4.45	18.8	8.5	2	B	10
08ASS-N15	12.7	7.95	7.9	3.96	16.5	11	1.52	A	9.8

开窗机链 Window Opener Chain

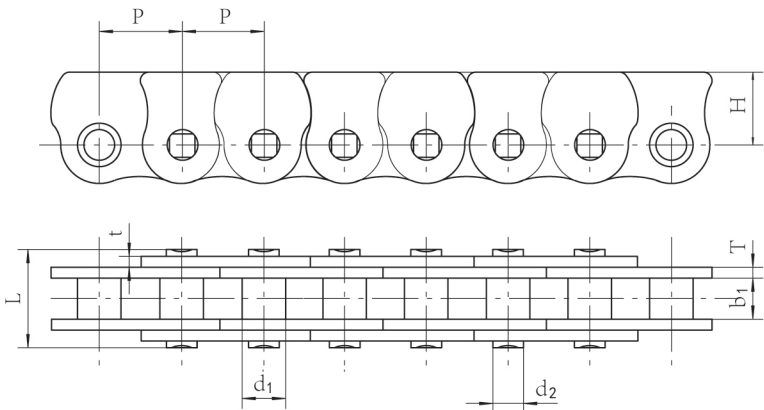

ANSI 链号 ChainNo.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴 Pin		链板 Plate		最小抗拉 强度 Minimum tensile strength
	p mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	L mm	H mm	t/T mm	Fu(min) kN
35SS-N15	9.525	5.08	4.8	3.58	12	8.5	1.27	7.9
35HSS-N15	9.525	5.08	4.8	3.58	12	8.5	1.27/1.8	7.9

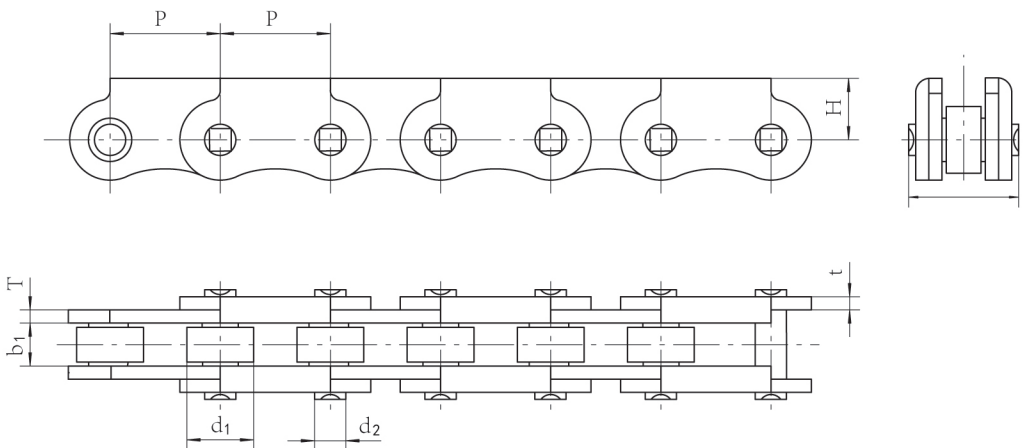

ANSI 链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴 Pin		链板 Plate		最小抗拉强度 Minimum tensile strength
Chain No.	p mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	L mm	H mm	t/T mm	Fu(min) kN
08HK	12.7	7.75	4.1	4.09	12.5	8.7	1.52	8.2