


1874 侧弯顶板链 1874 Sideflexing plate top chains

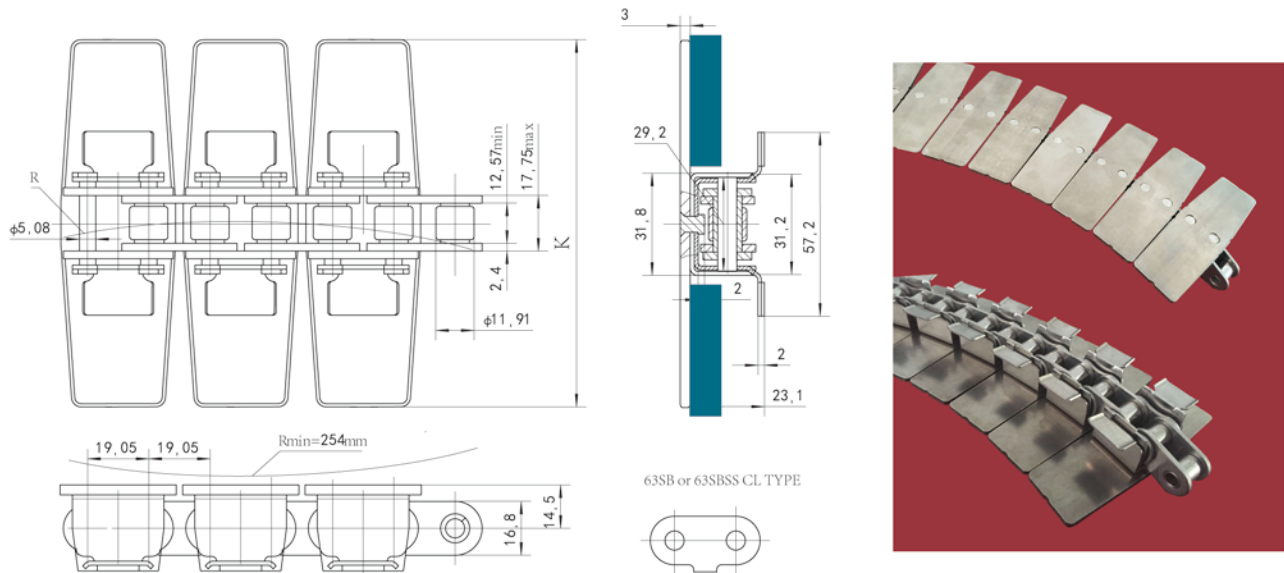

链号 Chain No.	材料 material		宽度 (Width) K		最小抗拉强度 Ultimate Tensile Strength Qmin		侧弯半径 Sideflex Radius R min		重量 Approximate weight	
	基型链 Base chain	顶板 Top plate	mm	inch	kN	lbf	mm	inch	kg/m	lb/ft
1874-K325	碳钢 Steel	碳钢 Steel	82.5	3 1/4	27	6,074	356	14	4.7	3.16
1874-K450			114.3	4 1/2			356	14	5.3	3.56
1874-K600			152.4	6			457	18	6.2	4.17
1874-K750			190.5	7 1/2			610	24	6.9	4.64
1874A-K325	碳钢 Steel	不锈钢 Stainless Steel	82.5	3 1/4	27	6,074	356	14	4.7	3.16
1874A-K450			114.3	4 1/2			356	14	5.3	3.56
1874A-K600			152.4	6			457	18	6.2	4.17
1874A-K750			190.5	7 1/2			610	24	6.9	4.64
1874SS-K325	不锈钢 Stainless Steel	不锈钢 Stainless Steel	82.5	3 1/4	20.9	4,702	356	14	4.7	3.16
1874SS-K450			114.3	4 1/2			356	14	5.3	3.56
1874SS-K600			152.4	6			457	18	6.2	4.17
1874SS-K750			190.5	7 1/2			610	24	6.9	4.64

- 说明: 1. 基型链条为63SB 或 63SBSS;
2. 链条运行在60链轮上;
3. 链条的强度在室温下所得;
4. 供应时, 每条链条的标准长度为160pitch 10Ft (3.048m)

- Note: 1. The Base chain is 63SB or 63SBSS
2. Chain runs on ANSI NO.60 sprockets
3. Chain strength is listed at room temperature
4. When supplied, the standard length of each chain is 160pitch 10Ft (3.048m)