




包装机链Packing Machine Chain

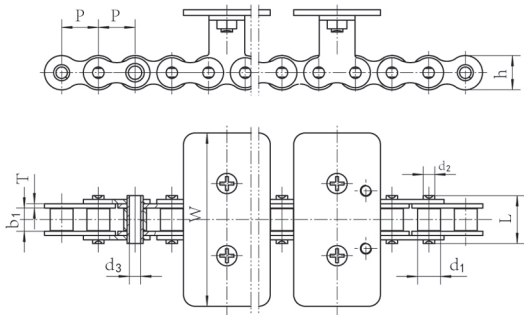

链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin			链 板 Plate			最小抗拉强度 Minimum tensile strength
	P mm	d ₁ (max) mm	ib _i (min) mm	d ₂ mm	d ₃ mm	L mm	W mm	h mm	t/T mm	Fu(min) kN
08BSS-T	12.7	8.51	7.75	4.45	4.5	17	60	11.8	1.65	12

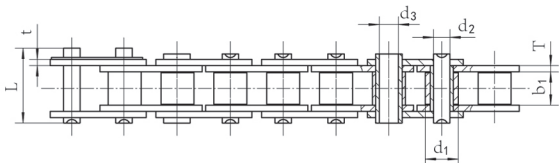


链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin			链 板 Plate		最小抗拉强度 Minimum tensile strength
	P mm	d ₁ (max) mm	b _i (min) mm	d ₂ mm	d ₃ mm	L mm	h mm	t/T mm	Fu(min) kN
08BSS-HP	12.7	8.51	7.75	4.45	4.5	18.2	11.8	1.65	7.8

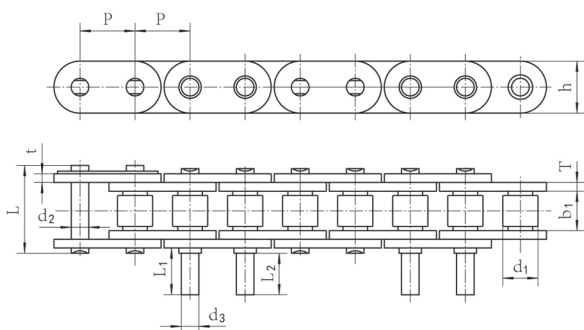


链号 Chain No.	节距 Pitch	滚子外径 Width between inner plates	内节内宽 Roller diameter	销 轴 Pin					链 板 Plate		最小抗拉强度 Minimum tensile strength
	P mm	b _i (min) mm	d _i (max) mm	d ₂ mm	d ₃ mm	L mm	L ₁ mm	L ₂ mm	h mm	t/T mm	Fu(min) kN
C50HSS-N1-II	15.875	10.16	9.5	5.08	5	26.6	13.5	12	15	3	16.2

包装机链Packing Machine Chain

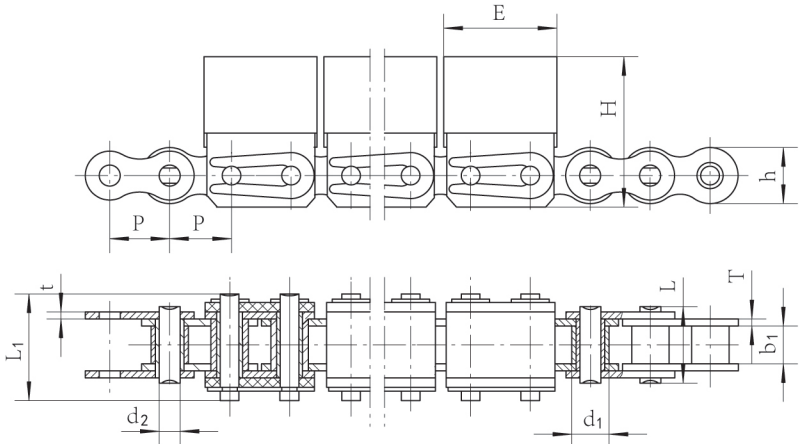

链号 Chain No.	节距 Pitch	滚子外径 Roller diameters	内节内宽 Width between inner plate	销 轴 Pin			链 板 Plate				最小抗拉强度 Minimum tensile strength
	P mm	d _i (max) mm	b _i (min) mm	d ₂ mm	L mm	L ₁ mm	E mm	H mm	h mm	t/T mm	Fu(min) kN
PM180712V	12.7	7.75	8.51	4.45	17	27	24.7	33.5	11.8	1.65	12.2

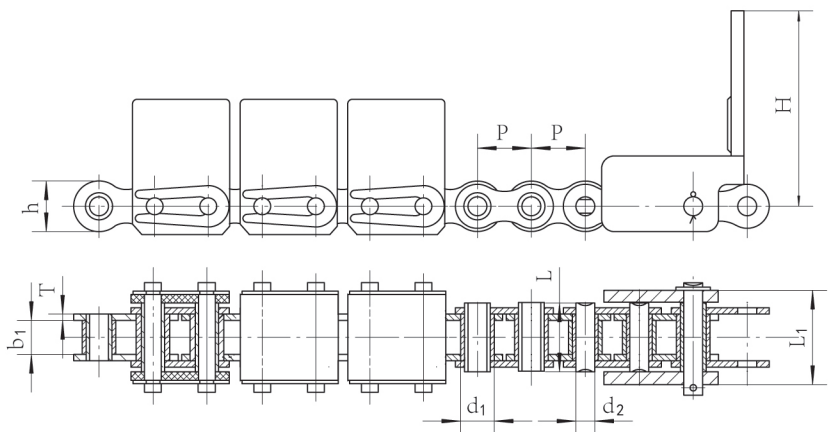

链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin			链 板 Plate			最小抗拉强度 Minimum tensile strength
	P mm	d _i (max) mm	b _i (min) mm	d ₂ mm	L mm	L ₁ mm	H mm	h mm	t/T mm	Fu(min) kN
SC361203A	12.7	8.51	7.75	4.45	17	27	46.5	11.8	1.65	12.2