


## 卷制套筒 Rolling-formed bush

### 卷制套筒

#### Rolling-formed bush

表格中列出的参数仅供参考，具体尺寸和公差根据客户要求。  
All parameters listed in the form are only for reference.  
The specific dimension and tolerance is upon on customer's request.

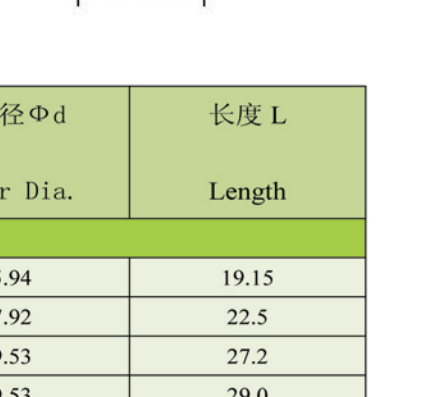

材质: 碳钢、合金钢 Material: carbon steel, alloy steel

链号 Chain No.	磨前外径ΦD <sub>1</sub> OD Before Grinding	成品外径ΦD Finished OD	内径Φd Inner Dia.	长度L Length
<b>A、B系列精密滚子链套筒 A、B Series Precision Roller Chain Bush</b>				
12AH		8.33	5.94	19.15
16A		11.1	7.92	22.5
20A	13.8	13.6	9.53	27.2
20AH	13.8	13.6	9.53	29.0
24A	15.8	15.6	11.1	35.2
24AH	15.8	15.6	11.1	36.9
28A	18.2	18.0	12.7	36.9
28AH	18.2	18.0	12.7	38.6
32A	20.2	20.0	14.27	44.96
32AH	20.2	20.0	14.27	46.6
32AF	20.2	20.0	14.27	22.65
32AF	22.68	22.48	17	45
40A	27.9	27.8	19.84	54.6
12BH	8.2	8.1	6.1	17.2
16B		11.3	8.39	25.25
16BN		11.55	8.28	21.0
20B	14.25	14.05	10.19	28.9
24B	18.89	18.69	14.63	37.7
24BH	18.89	18.69	14.63	40.7
28B	20.57	20.37	15.9	46.4
32B	22.68	22.48	17.81	45.47
32BH		22.6	17.88	47.2
<b>农用输送机套筒 Agricultural Conveyor Chain Bush</b>				
S32		6.37	4.45	20.1
S32V		7.03	5.08	20.4
S42		10.0	7	25.2
S45		8.33	5.74	28.4
S51		8.33	5.72	21.9
S52		8.33	5.74	28
S52F1SD	11.3		8	24
S52F1	10.3	10.1	6.92	24.3

## 卷制套筒 Rolling-formed bush

### 卷制套筒

#### Rolling-formed bush

链号 Chain No.	磨前外径ΦD <sub>1</sub> OD Before Grinding	成品外径ΦD Finished OD	内径Φd Inner Dia.	长度L Length
<b>农用输送机套筒 Agricultural Conveyor Chain Bush</b>				
S52LV	8.53	8.33	5.72	21.8
S52LV		10.2	6.92	22.2
S55	8.53	8.33	5.72	28.4
S55R	12.1		8.9	29.7
S55H		11.9	8.9	28.2
S55H		11.1	8.38	30.5
S55H-WA3-2		12.5	8.3	30.2
S77		12.2	8.92	30.9
S88		12.2	8.92	37.3
S55H-TA10		11.9	9	30.8
HS-S55		8.3	5.74	28.5
S62		8.33	5.72	31.6
S62F1	11.7	11.5	8.5	31.7
S62F3	12.2		8	31.7
SC62		11.5	8.28	16.75
CA413		11.5	8.28	28.6
S414		11.5	8.28	28.9
CA550	10.8	10.6	7.19	25.8
CA550H		11.1	7.16	26.4
CA550HD		11.1	8.28	25.6
CA550-K1		11.07	7.38	25.9
CA550S55		11.1	7.16	27.2
CA550F4K19.02	10.8	10.6	7.14	26.2
CA555		11.1	7.16	19.3
CA555-C6E		10.73	7.36	19.43
CA557	11.8	11.6	8.0	26.7
CA557-K27S		11.67	8.1	27.15
CA620	10.8	10.6	7.19	31.5
CA620-C13E		11.11	7.16	31.9
CA643		11.5	8.28	30.5
CA645		11.5	8.28	30.0
CA650F1		15.75	11.28	33.6
CA650Ap		16.0	11.28	33.6
AS5		13.8	11.11	26.5
TCAS50F2		10.0	7.0	23.3
<b>空心销轴套筒、空心销轴、空心连接销轴 Hollow Pin Chain Bush, Hollow Pin, Hollow Connecting Pin</b>				
08BH 套筒		8.51	6.45	11.2
08BH 销轴		6.38	4.6	16.8
08BHP 销轴		6.38	4.6	18.0

## 卷制套筒 Rolling-formed bush

### 卷制套筒

#### Rolling-formed bush

链号 Chain No.	磨前外径ΦD <sub>1</sub> OD Before Grinding	成品外径ΦD Finished OD	内径Φd Inner Dia.	长度L Length
<b>空心销轴套筒、空心销轴、空心连接销轴 Hollow Pin Chain Bush, Hollow Pin, Hollow Connecting Pin</b>				
10BH 销轴		5.94	4.04	19.6
10BH 套筒		10.16	7.13	13.2
10BHP 销轴		7.03	5.13	19.5
10BHP 套筒		10.2	6.92	23.2
12BH 销轴		8.1	5.8	22.7
12BH 套筒		12.07	8.18	15.5
12BHP 销轴		8.1	5.8	22.7
12BHP 套筒		8.1	5.8	23.6
16BH 销轴		15.88	11.2	25.35
16BH 套筒		11.1	8.2	35.7
16BHP 销轴		11.1	8.2	37.0
16BHP 套筒		11.1	8.2	37.0
16HHP 销轴		11.5	8.33	36.1
P31.75-1 销轴		8.33	6.2	26.0
P31.75-1 套筒		8.33	6.2	26.8
P35 销轴		17.0	14.2	20.0
P35 套筒		14	10.2	30
HP35 套筒	17.1	17.0	13.8	21.321.2
40HP 套筒	13.8	13.8	10.5	31.0
40HP 销轴	7.95	7.95	5.69	11.0
40HP 套筒	5.67	5.67	4.1	16.65
40HP 销轴	5.67	5.67	4.1	17.9
ZC40 套筒		17.0	14	23.0
ZC40 销轴		14	10.2	35.0
ZC40C 套筒		16.95	14.05	23.2
ZC40C 销轴		13.95	10.2	35.9
P50 套筒		17	14.1	21.0
P50 销轴		14	10.2	31
P50 套筒		14	10.2	33
MC40F2-P-50.8 销轴		14.2	9.7	36.0
MC40-P-50.8 套筒	17.2	17.0	14	24.2
MC40-P-50.8 销轴	14.2	14.0	10.2	36
HP41.75F1 套筒	14.2	14	11.11	26.8
HP41.75F1 销轴	11.3	11.11	8.2	35.7
50HP 套筒		10.16	7.03	13.7
50HP 销轴		7.03	5.13	20.5
50HP 套筒		7.03	5.13	21.6
50HHP 套筒		10.16	7.03	14.5
50HHP 销轴		7.03	5.12	22.2

## 卷制套筒 Rolling-formed bush

### 卷制套筒

#### Rolling-formed bush

链号 Chain No.	磨前外径ΦD <sub>1</sub> OD Before Grinding	成品外径ΦD Finished OD	内径Φd Inner Dia.	长度L Length
<b>空心销轴套筒、空心销轴、空心连接销轴 Hollow Pin Chain Bush, Hollow Pin, Hollow Connecting Pin</b>				
50HHP 销轴		7.03	5.12	23.2
HB50-T1 套筒		17.02	13.82	23.2
HB50-T1 销轴		13.85	10.1	36.1
60HP 套筒		11.91	8.35	17.6
60HP 销轴		8.35	6.0	25.6
60HHP 销轴		8.33	6.0	26.6
60HHP 套筒		8.33	6.0	29.5
60HHP 销轴		8.33	6.0	30.5
60HHP 套筒		8.33	5.01	25.6
60HFP1 销轴		8.33	5.01	26.6
MC60-P-101.6 套筒	23.2	23.0	19	31.1
MC60-P-101.6 销轴	19.2	19	13.2	45
ZC60C 销轴		19.05	13.2	45
HB38.1		12.1	9.7	17.3
HB63F7 销轴	17.2	17.0	14.0	26.3
HB63F7 套筒	14.2	14.0	10.2	38
80HP 套筒		15.88	11.2	22.4
80HP 销轴		11.1	8.05	33.2
80HP 套筒		11.1	8.05	34.1
80HHP 销轴		11.1	8.05	36.9
100HPF1 销轴	13.5	13.35	10.3	36
400C 套筒		17.0	14	21.0
400C 销轴		14	10.2	30.0
1650HPZS400 销轴		11.4	8.2	27.4
C2052HP 销轴	7.42		5.12	20.5
C2062H-HP-SL 套筒		11.91	8.3	19.2
C2062H-HP-SL 销轴		8.3	6.03	29.3
C2080HP 套筒		15.88	11.11	22.5
C2080HP 销轴		11.11	8.06	32.7
C2080H-HP 销轴		11.1	8.05	36.4
C2082HP 销轴	11.6		8.05	32.5
C2082H-HP		15.88	11.11	24.05
C2082H-HP 销轴		11.11	8.05	36.1
<b>其它链条套筒 Other Chain Bush</b>				
12AF6	8.53	8.33	5.94	23.9
12AW1		8.33	5.94	30.35
12AW3/4		8.33	5.94	24.1
12AWS/CD		8.33	5.94	27.1
12BS	8.3	8.1	5.72	23

## 卷制套筒 Rolling-formed bush

### 卷制套筒

#### Rolling-formed bush

链号 Chain No.	磨前外径ΦD <sub>1</sub> OD Before Grinding	成品外径ΦD Finished OD	内径Φd Inner Dia.	长度L Length
<b>其它链条套筒 Other Chain Bush</b>				
81XH		15.6	11.1	43.7
81XHH	15.6	15.6	11.1	43.0
90R		15.6	11.1	31.7
94R		20.9	14.27	43.3
M100	22.1	21.0	15.9	48
MC100		15.0	10	24.2
Z100C		23.0	19.15	29.5
P100	15.2	15.0	10	28.8
P110		20.0	15	48.5
P100F1	13.8	13.6	9.53	33.2
S100P-S		15.6	12.0	36.0
TGC200-40		8.45	5.94	26.68
205PF		11.1	8.35	17.0
208BT		6.37	4.45	27.0
C212AHF		10.0	7	25.4
C212AHF-F3		10.0	7	23.3
D28		8.1	6.1	17.2
N381-D2	11.3	11.1	7.92	28.8
CA384-K1		11.51	8.43	25.45
538.4	11.5	11.5	8.92	20.0
630SK	10.3	10.1	7.11	16.9
RS886		15.6	11.1	38.7
955SHK		14.5	11.3	30.6
P100F		15.0	10	25.5
1115-04		15.6	11.1	31.3
1117-04		20.0	14.27	37
MSK1302	18.05	18.0	12.63	39.4
1304-19.05		8.33	5.95	19.0
C2042HP		10.0	7.2	11.0
RF2050R		7.13	5.15	13.8
C2052	10.16	10.16	7.26	13.7
C2060T	8.1	8.05	6.05	39.8
C2062HP		8.33	5.94	19.3
C2060H		11.91	8.31	17.7
C2062HT		8.33	5.94	22.6
#2100		13.4	9.75	28.9
2100H-1		13.4	9.7	28.3
LR2412		11.52	8.52	25.45

材质: 不锈钢 Material: stainless steel

链号 Chain No.	磨前外径ΦD <sub>1</sub> OD Before Grinding	成品外径ΦD Finished OD	内径Φd Inner Dia.	长度L Length
25SS		3.3	2.31	4.7
35SS		5.08	3.58	7.4
40SS	5.76			